

SHAD


ZONTES E125 '24 / E350 '23-

SHAD LOCKS Z0E354SC

SIZE

7

BCN



1 263431 x 1

2 263432 x 1




3 262939 x 1



4 262919 x 1
8 x 6 x 15



5 303000 x 1
Ø6




6 304153 x 1
M6 x 110 DIN 912

WARNING!

- | | | | | |
|---|--|---|---|---|
| <p>(GB)
Tight firmly the pivot.
Make sure that the pivot is firmly tight.
LUBRICATE ONLY WITH WD-40 OIL!
Check tightness every 4 months..</p> | <p>(E)
Apretar el pivote fuertemente. Asegurarse de que el pivote queda totalmente fijado. LUBRICAR SOLO CON ACEITE WD-40!
Reparar apriete cada 4 meses.</p> | <p>(D)
Zapfen besonders fest anziehen und sicherstellen, dass er sich nicht mehr bewegen kann. ALS SCHMIERMITTEL IST NUR ÖL VOM TYP (WD 40) ZU VERWENDEN
Alle 4 Monate Drehmoment überprüfen.</p> | <p>(I)
Premere il perno con forza. Assicurarsi che il perno sia opletamente fissato. LUBRIFICARE SOLO CON OLIO WD-40!
Controllare il serraggio delle viti ogni 4 mesi..</p> | <p>(F)
Serrer fortement le pivot. S'assurer qu'il reste totalement fixé. AVEC WD-40!
Vérifier le serrage des vis tous les 4 mois.</p> |
|---|--|---|---|---|

1

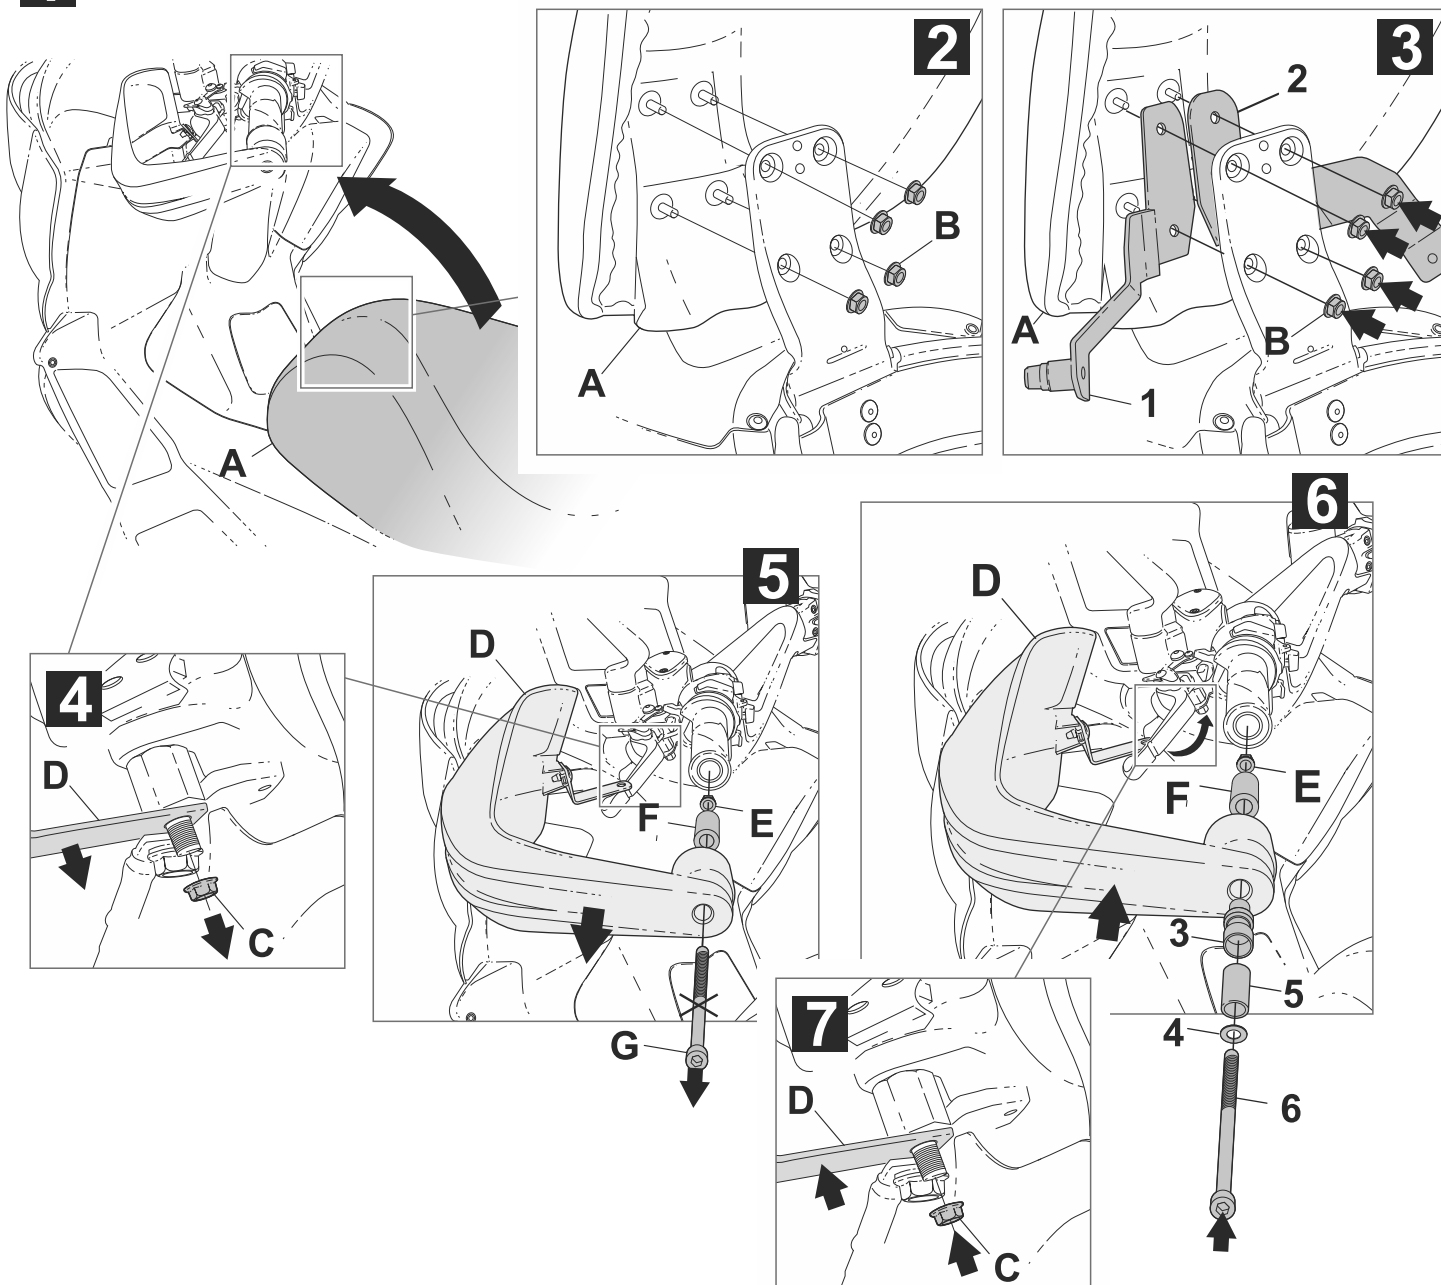

WWW.SHAD.ES